

D66A1155

ISSUE
A

IF IN DOUBT-ASK
DO NOT SCALE


FIRST W.O.

A.V.R. STANDARD
POSITION

REMOVABLE SIDE COVERS

A.V.R. ALTERNATIVE
POSITION

INDICATES POSITION OF A.V.R.

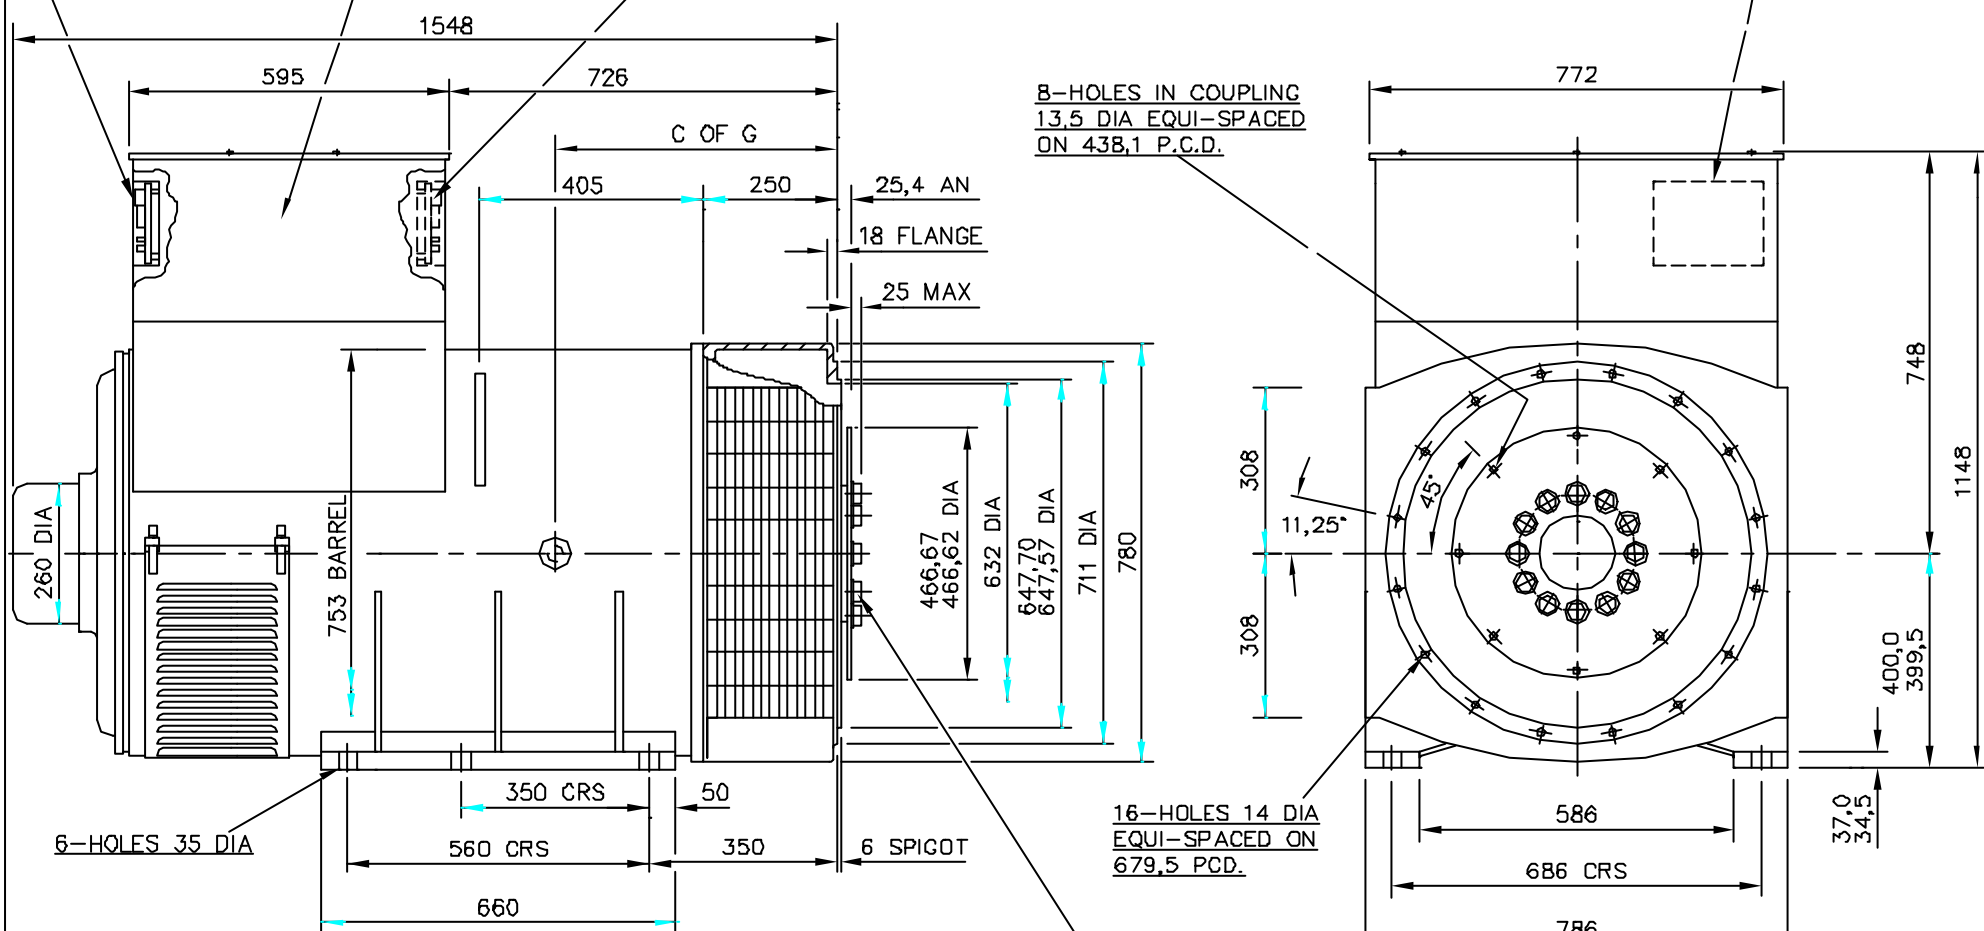

CORE	C of G
W	682
Y	715

6-PLATE COUPLING TOTAL THICKNESS
7.2. HUB SECURING BOLTS TO BE
TIGHTENED TO A TORQUE OF
84Kgf m 822N m

NOTE:-
CUSTOMER MAY CUT CABLE ENTRY HOLES AS REQUIRED IN ANY OF THE
FOUR TERMINAL BOX SIDES SUBJECT TO POSITION OF AVR TERMINALS ETC.

CERTIFIED PRINT (ONLY IF SIGNED)	HC634W/Y 1-BRG ALTERNATOR.	SCALE	FIRST W.O.
BY	ADAPTOR - SAE0	1:10	UNIT OF MEASUREMENT MILLIMETRES (mm)
DATE	COUPLING - SAE14		
DRAWN	STANDARD T/BOX		
CH'D			
APP'D			
4/2172/2	A RMAC 23:12:99 ORIGINAL ISSUE.	NEWAGE INTERNATIONAL Ltd	D66A1155
MOD.	ISS. DRN. DATE ALTERATION	STAMFORD ENGLAND	ISSUE A